


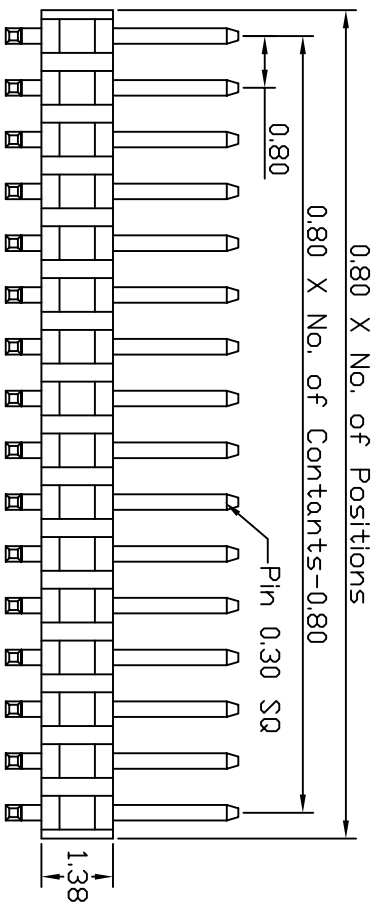


NO.	REV.	MODIFY NOTES	REVISED	DATE
1	A1	新版发行	Wanglong	09.02.18

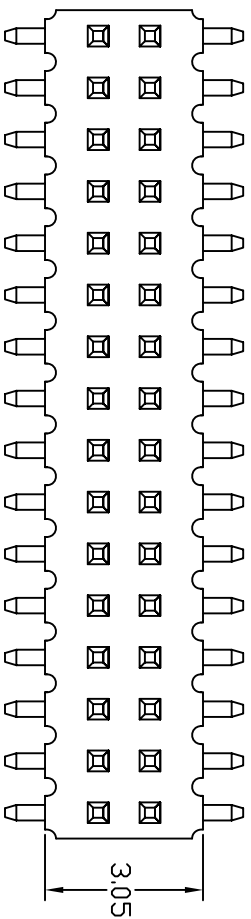

## SPECIFICATIONS

Current Rating	: 0.75AMP
Operation Temperature	: -40°C to +105°C
Contact Resistance	: 30m Ω Max.
Insulation Resistance	: 1000M Ω Min
Withstanding Voltage	: AC 500V
Insulator Material	: Polyester (UL94V-0) Standard: Nylon-6T
Contact Material	: Bronze
Contact Plating	: Au or Over 50 U" Ni

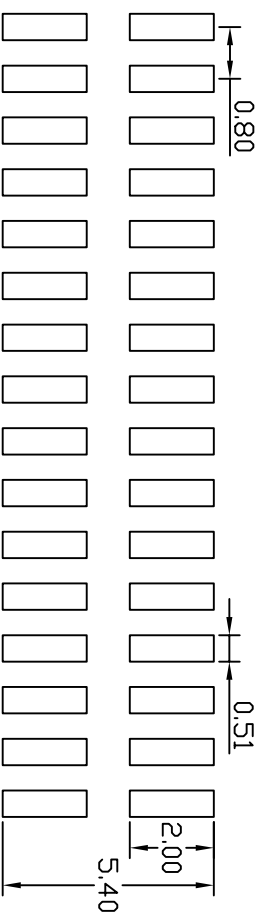

## PCB LAYOUT

TOLERANCE:	
X. ±XXX	
.X ±0.20	
.XX ±0.10	
ANG.	
<b>NT</b>	
<b>東莞市安拓電子有限公司</b> <b>DONGGUAN ANTUO electronic co.,LTD</b>	
地址: 廣東省東莞市長安鎮銅湖第一工業區 電話: 0769-82716236 傳真: 0769-82716087	
TITLE:	0.8*1.2mm, Pin Header, Dual Row, S.M.T
DWG NO.	AT-09020001
THIRD ANGLE PROJECTION	

SIGNATURE		DATE	
D R N.	Wanglong	2009.02.18	
C H K.	Devil	2009.02.18	
A P P.	Summer	2009.02.18	
CODE NO.	JW00	CUS. NO.	
SCALE	None	UNIT	mm
PAGE	1/1		