



NO.	REV.	MODIFY NOTES	REVISED	DATE
1	A1	新版发行	Wanglong	09.02.18

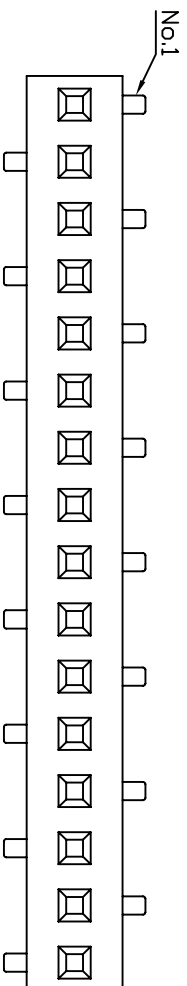

TYPE 1

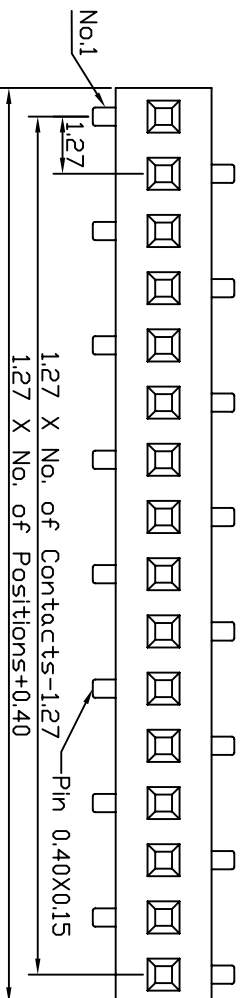

TYPE 2

### SPECIFICATIONS

Current Rating : 1AMP

Operation Temperature : -40°C to +105°C

Contact Resistance : 20mΩ Max.



Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 500V

Insulator Material : Polyester (U194V-0)  
Standard: Nylon-6T

Contact Material : Phosphor Bronze

Contact Plating : Au or Over 50 U" Ni

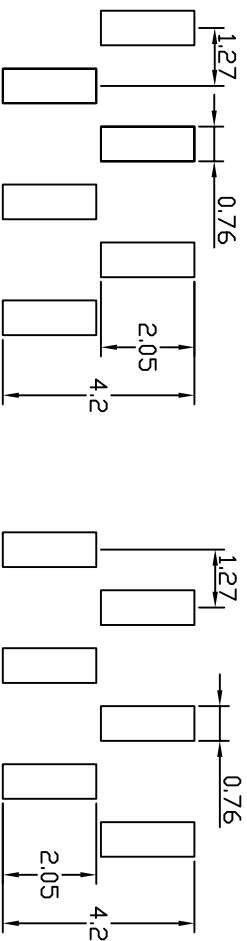

TYPE 1

TYPE 2

### PCB LAYOUT

TOLERANCE:	
X	±XXX
X	±0.20
.XX	±0.10
ANG.	
<b>東莞市安拓電子有限公司</b> <b>DONGGUAN ANTUO electronic co.,LTD</b>	
TITLE: 1.27mm Female Header, Single Row, S.M.T	
DWG NO.	AT-09020062
THIRD ANGLE PROJECTION	

SIGNATURE		DATE		CODE NO.	
Wanglong		2009.02.18		JW00	
CH.K.		Devil		CUS. NO.	
A.P.P.		Summer		SCALE	
		2009.02.18		None	
				UNIT	
				mm	
				PAGE	
				1/1	