

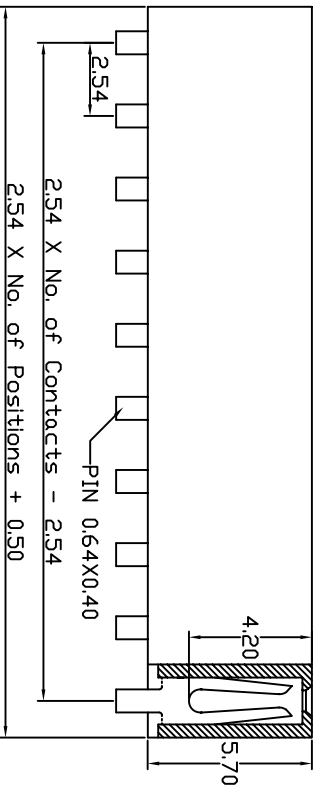


NO.	REV.	MODIFY NOTES	REVISED	DATE
1	A1	新版发行	Wanglong	09.02.18

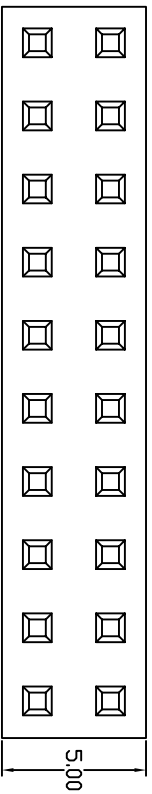

SPECIFICATIONS

Current Rating : 3AMP

Operation Temperature : -40°C to +105°C

Contact Resistance : 20mΩ Max.


Insulation Resistance : 1000MΩ Min

Withstanding Voltage : AC 1000V

Insulator Material : Polyester (U194V-0)

Contact Material : Standard: PBT
: Phosphor Bronze

Contact Plating : Au or Sn Over 50 U"Ni

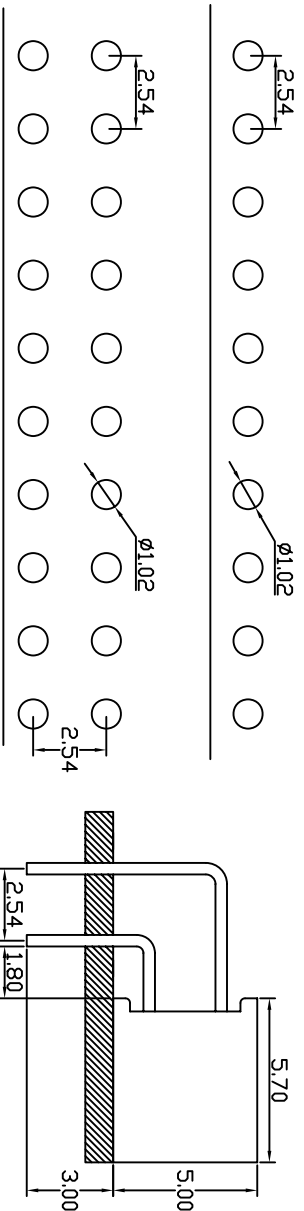

PCB LAYOUT

TOLERANCE:			
X.	±XXX		
.X	±0.20		
.XX	±0.10		
ANG.			
TITLE:		2.54mm Female Header, Single/Dual Row, Right Angle	
DWG NO.		AT-09020103	
		THIRD ANGLE PROJECTION	

NT

東莞市安拓電子有限公司
DONGGUAN ANTUO ELECTRONIC CO.,LTD

地址: 廣東省東莞市長安鎮柳屋第一工業區 電話: +0769-82716236 傳真: +0769-82716087

SIGNATURE		DATE		CODE NO.	
Wanglong		2009.02.18		JW00	
CH K.		2009.02.18		CUS. NO.	
Summer		2009.02.18		SCALE	
				UNIT	
				PAGE	
				1/1	